

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/040465 A1

(51) International Patent Classification⁷: **D01H 1/10**

[TR/TR]; Altintepsi Mah. Poyraz Sok. No:2, Bayrampasa, 34160 Istanbul (TR).

(21) International Application Number:
PCT/EP2004/000301

(74) Agent: **FRANK B. DEHN & CO.**; 179 Queen Victoria Street, London EC4V 4EL (GB).

(22) International Filing Date: 16 January 2004 (16.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003/01753 14 October 2003 (14.10.2003) TR

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **AGTEKS ORME TEKNOLOJILERI SANAYI VE TICARET LIMITED SIRKETI** [TR/TR]; Altintepsi Mah. Poyraz Sok. No: 2, Bayrampasa, 34160 Istanbul (TR).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **AGRIKLI, Mehmet**

[Continued on next page]

(54) Title: TWISTING MACHINE CAPABLE OF INDEPENDENTLY CONTROLLING TWISTING SPEED AND WINDING SPEED AND METHOD OF THE SAME

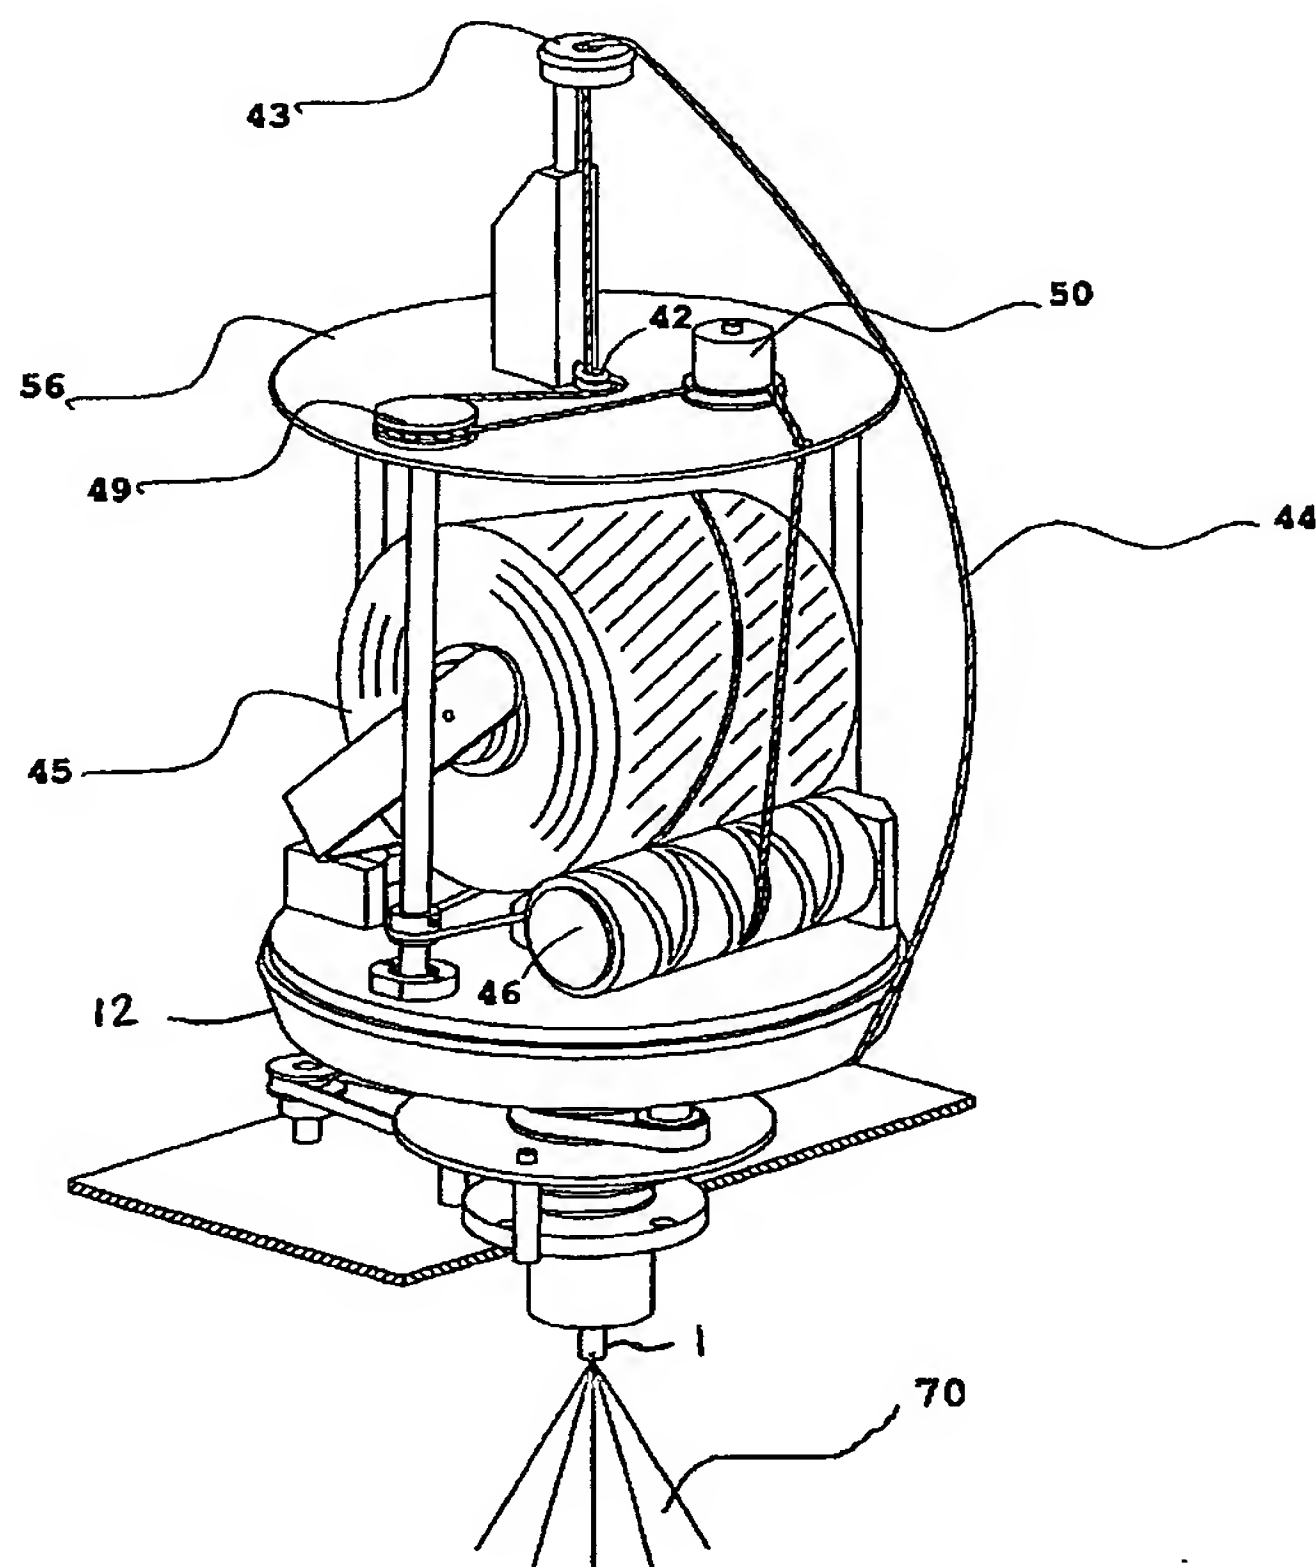

(57) Abstract: The invention relates to a twisting machine capable of independently controlling the twisting speed of a thread or plurality of threads and the winding speed of the twisted threads i.e. the twisting density in a certain length and the method of the same. Thus, a twisting machine is provided comprising: a spindle (1) extending in an axial direction from a first end to a second end thereof; drive means for rotatably driving the spindle (1); a rotor coaxially mounted to the spindle adjacent the second end thereof; winding means for winding thread onto a bobbin; a stationary carrier supported over the rotor on the opposite side thereof from the spindle, the carrier supporting the bobbin thereon; and thread guide means spaced in the axial direction from the carrier, wherein in use, thread extends from the spindle via the radially outer edge of the rotor to the thread guide means, characterized in that the machine comprises means for independently moving the spindle and the winding means.



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*